

MeshAP™ 2180/2180G

Outdoor

2.4GHz/5.8GHz/5.3GHz
Selectable Frequency
Full-Duplex
Wi-Fi Mesh Network
Access Point

**ARROWSPAN**



Reliable, Intelligent, High Performance Mesh Network

- Patented Auto-discovery, auto-configure, and auto-healing POP (Predictable Optimum Path) mesh routing algorithm
- Multiple wireless path design for both backhaul and user traffic eliminates adjacent AP signal interference and provides zero performance degradation
- Best network throughput via layer 2 fast switching and bridging from AP to AP to support real time video, voice, and data applications

Fully Compatible with Existing Access Server, Router, and Gateway

- Transparent to layer 3 and up protocols, fully compatible with existing network equipment
- Directly connects to existing Router, Gateway, or AP through 10/100 Ethernet

Management and Security

- Supports Web Based browser & SNMP*
- Supports WEP encryption security across wireless mesh network
- Mesh network protection with user defined Mesh ID

Converting Hotspots to Hotzones is the best way to increase WiFi service revenue by reaching more subscribers with minimum capital investment and operating cost. ArrowSpan's MeshAP 2180/2180G is ideal for users who are looking to deploy large scale mesh networks using industrial strength access points. Users can choose between 5.8GHz, 5.3GHz or 2.4GHz depending on their needs.

A Mesh Link is a true wireless connection between any two MeshAP units. ArrowSpan's MeshAP access point will automatically discover its neighboring MeshAP unit(s) and interconnect all the access points together to form a large coverage wireless network.


MeshAP 2180/2180G implements Layer 2 mesh routing which provides excellent network performance and is fully compatible with existing network equipment and applications. The MeshAP 2180/2180G is able to support high-bandwidth and low latency applications like real-time video and voice.

Predictable Optimum Path (POP) routing algorithm creates a MeshAP 2180/2180G based Wi-Fi mesh network with the best throughput, reliable mesh link, and self-discovery/self-configuration/self-healing benefits. The algorithm's human-like intelligence examines the network and makes appropriate connections among MeshAPs in real time. It also re-establishes a new network when obstacles, individual node problems, new nodes or internet access events occur.

High throughput Mesh Network is achieved by non-blocking and no-interference for client and backhaul traffic. ArrowSpan's multi-radio and multi-channel design eliminates wireless signal interference and traffic conflict problems that exist on many other mesh network products.

The web-based (HTML) management interface and SNMP enables both professional and non-technical users to easily handle network management and maintenance tasks for the MeshAP units. The "Point and Click" browser interface permits users to monitor node condition, link quality, traffic flow, and event logs of the MeshAP units on the mesh network. The web-based Topology function also allows Network administrators to easily configure, update, and monitor every MeshAP station on the mesh network. SNMP private MIBs are available for advanced user preferring to manage through their own network

MeshAP™ 2180/2180G

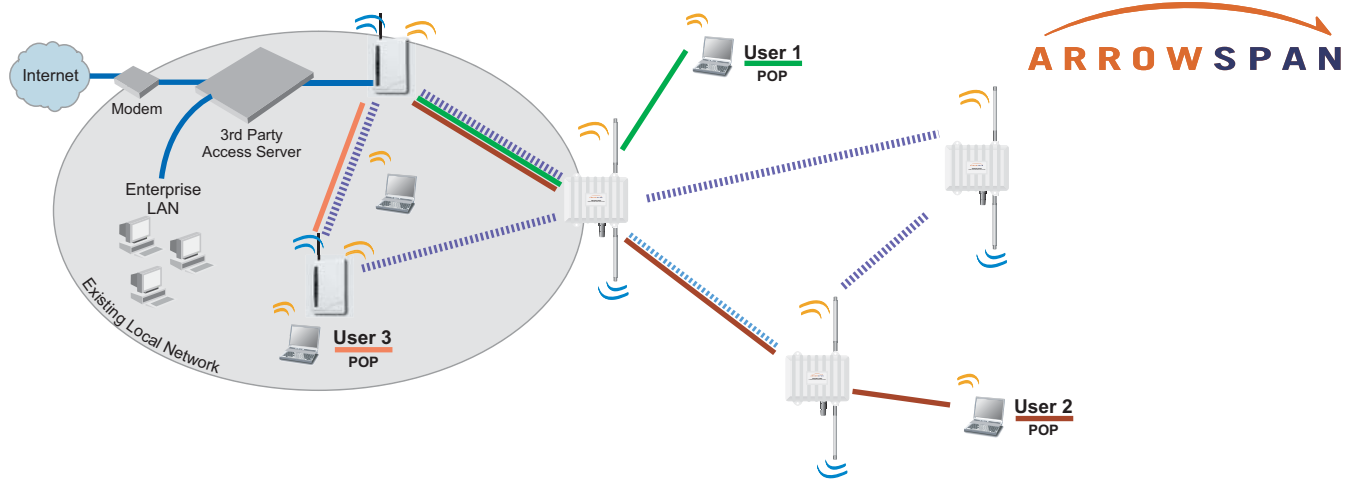

Specifications

Wireless

Standards: IEEE 802.11a, 802.11g, 802.11b
Media Access Protocol: CSMA/CA with ACK
Frequency: 5.8GHz/5.3GHz ISM radio band
 2.4GHz ISM radio band

GPS: CXD2951 (Model No: MeshAP2180/2180G)

Modulation

802.11a: OFDM((64-QAM, 16-QAM, QPSK, BPSK)
 802.11g: OFDM(64-QAM, 16-QAM, QPSK, BPSK)
 802.11b: CCK(11, 5.5MHz), DOPSK(2Mbps), DQPSK(1Mbps)

Data Rates

802.11a: 6, 9, 12, 18, 24, 36, 48, 54, 72, 96, 108Mbps
 802.11g: 6, 9, 12, 18, 24, 36, 48, 54, 72, 97, 108Mbps
 802.11b: 1,2, 5.5, 11Mbps

Tx Power

802.11a: typical 22.5dBm
 802.11g: typical 23dBm
 802.11b: typical 24dBm

Channels

802.11a: USA, Canada: 12 non-overlapping channels (5.15 ~ 5.35GHz, 5.725~5.825GHz)
 Europe: 19 non-overlapping channel (5.15~5.35GHz)
 Japan: 8 non-overlapping channels (5.15~5.35GHz)
 China: 5 non-overlapping channels (5.725~5.85GHz)
 802.11g: USA, Canada: 11
 Most European countries: 13
 Japan: 14
 802.11b: USA, Canada, Taiwan: 11
 Most European countries: 13
 France: 4
 Japan: 14

Antenna (Not included in package)

(2x) 8dbi 5GHz omni directional antenna

Minimum Distance Requirement (Node to Node)

Open Space: 132ft(40m)

ArrowSpan, Inc.

4800 Great America Parkway
 Suite 238
 Santa Clara, CA 95054
www.arrowspan.com

Information presented herein is based on data available, is subject to change without notice.

Copyright ©2007 ArrowSpan, Inc. ArrowSpan, and MeshAP are trademarks of ArrowSpan, Inc. All rights reserved.

Mesh Network Performance

Operating Range

802.11a
 Outdoor: 85m@54Mbps, 350m@6Mbps
 Indoor: 25m@54Mbps, 60m@6Mbps

802.11b

Outdoor: 350m@11Mbps, 400m@1Mbps
 Indoor: 45m@11Mbps, 70m@1Mbps

802.11g

Outdoor: 90m@54Mbps, 400m@6Mbps
 Indoor: 30m@54Mbps, 65m@6Mbps
 (Transmission speed may vary according to the environment)

Encryption & Security

64bit, 128bit WEP encryption (Hardware Accelerated)
 WPK (Hardware Accelerated)
 Mesh operator username/password
 Mesh ID protection
 RESET button to factory default (Inside Enclosure)

Network Management

Web based (HTML) Management
 SNMP*

Hardware Specifications

Network Ports

(1) 10/100Mbps auto crossover Ethernet WAN Port
 (For connecting to Router or Gateway)

Power

Power Interface: POE

Environmental Conditions

Operating Temperature: -40°F to 131°F (-40°C to 55°C)
Storage Temperature: -50°F to 158°F (-58°C to 70°C)
Humidity: 95% maximum relative humidity, non-condensing

Physical Specifications

Dimension: 23.4cm x 17cm x 6.3cm
Weight: 1.5kg

Enclosure

Rating: IP66 water proof
 Antenna Connector: (2) weatherproof antenna connectors
 Power Connector: (1) weatherproof Power/Data connector

Regulatory Compliance

Certification: FCC Part 15